

© EPODOC / EPO

PN 7042065 A 19950210
 PD - 5-02-10
 PR - JP19930204608 19930726
 OPD - 1993-07-26
 TI - TUFTED CARPET
 IN - KANO TAKESHI
 PA - IKEDA BUSSAN CO
 IC - D05C17/02 ; A47G27/02 ; B60N3/04
 CT - JP4018171 A [] ; JP59094938B B []


© WPI / DERWENT

TI - Tufted carpet for floor mat of automobile - comprises ground synthetic resin impregnated ground fabric and pile layer formed by tufting ground fabric
 PR - JP19930204608 19930726
 PN - JP7042065 A 19950210 DW 199516 D05C17/02 003pp
 PA - (IKED) IKEDA BUSSAN CO
 IC - A47G27/02 ; B60N3/04 ; D05C17/02
 AB - J07042065 Tufted carpet comprises a ground fabric with imparted forming property and rigidity by impregnating a synthetic resin, and a pile layer formed by tufting in the ground fabric.
 - The pile of the ground fabric and pile layer comprises polyester fibre, PP fibre, acryl fibre, polyamide fibre. The synthetic resin include synthetic resin such as acryl resin, styrene resin, vinyl acetate resin, acryl-styrene copolymer, phenol resin, urea resin, melamine resin, epoxy resin, urethane resin, or monomer, oligomer, prepolymer of the above synthetic resin.
 - The above synthetic resin is impregnated in the ground fabric in soln. or emulsion, or 100 % liquid in the case of monomer. Amt. of impregnation is ordinary 100-200 g per m squared as solid. The carpet is carried backing if desired, and the backing material include PE sheet, styrene-butadiene rubber latex, acryl resin emulsion, with being unit wt. of 200-300 g per m squared.
 - USE/ADVANTAGE - Useful for floor mat or automobile. The carpet is light wt. and has high rigidity.(Dwg. 0/4)
 OPD - 1993-07-26
 AN - 1995-119197 [16]


© PAJ / JPO

PN - JP7042065 A 19950210
 PD - 1995-02-10
 AP - JP19930204608 19930726
 IN - KANO TAKESHI
 PA - IKEDA BUSSAN CO LTD
 TI - TUFTED CARPET
 AB - PURPOSE: To obtain a lightweight and high-rigidity carpet suitable for covering floor of automobile.
 - CONSTITUTION: Ground fabric 12 having a pile layer 13 formed by tufting is impregnated with a synthetic resin to produce a carpet 11 having high rigidity and provided with moldability.
 I - D05C17/02 ; A47G27/02 ; B60N3/04


【図1】

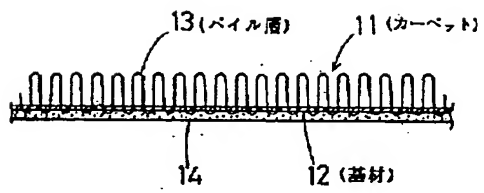

【図2】



【図4】



【図3】

